



CATALOG NUMBER	
PROJECT NAME	TYPE
VOLTAGE	LAMPS

SPECIFICATIONS

- 2 Configurations Available
 - 4 ft., 1 lamp T5 HO
 - 8 ft., 2 lamp T5 HO
- Light weight extruded aluminum housing
- Enhanced reflector
- Heavy gauge mounting bracket.
 - Light can be installed at various angles
 - Can absorb impact without falling
- Lenses
 - Acrylic (Standard)
 - Polycarbonate
- Custom Colors Available
- Sensor Control available
 - Various sensing patterns available
 - Program start ballast standard
- 480V Available

T5HO Dock Light

4 Ft. and 8 Ft



Fluorescent Dock Light

**Energy Saving
Long Life
Excellent Color
Occupancy Controlled
Fixed Position**

ORDERING GUIDE:

DL8 - ***T5*** - ***T8/N*** - ***HPA***

SERIES	BALLAST	BALLASTS	OPTIONS
<input type="checkbox"/> DL4 <input type="checkbox"/> DL8	<input type="checkbox"/> T5	<input type="checkbox"/> UH - 120/277V HO <input type="checkbox"/> 4H - 347/480V HO	<input type="checkbox"/> PC - POLYCARBONATE CLEAR LENS <input type="checkbox"/> AC5 - 5 FT AC CABLES <input type="checkbox"/> AC10 - 10 FT AC CABLES <input type="checkbox"/> XXXXBBY - Y= # OF LAMPS XXXX= TOTAL # OF LUMENS REQUIRED <input type="checkbox"/> FIOS - FACTOR INSTALLED OS <input type="checkbox"/> LIXX - LAMPS INSTALLED XX = LAMP COLOR (EX. LI85 = 850 5000k) <input type="checkbox"/> CORDX - CORD X= SPEC LENGTH <input type="checkbox"/> QDCX - QUICK DISCONNECT CORD, X= SPECIFY LENGTH <input type="checkbox"/> EB- EXTRA BALLAST





CATALOG NUMBER	
PROJECT NAME	TYPE
VOLTAGE	LAMPS

APPLICATIONS

- Warehouses
- Distribution Centers

T5HO Dock Light **4 Ft. and 8 Ft**

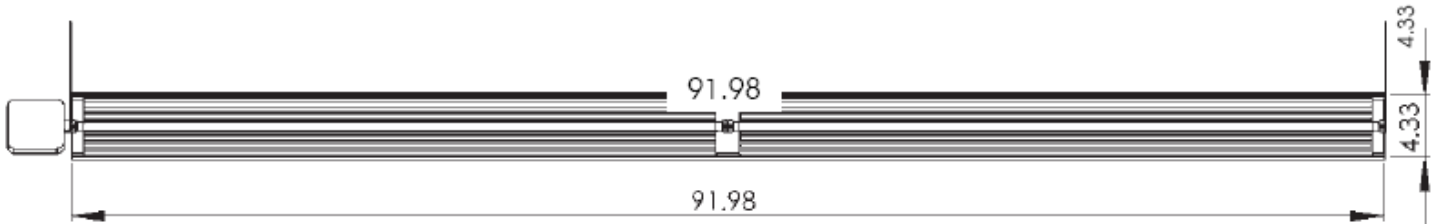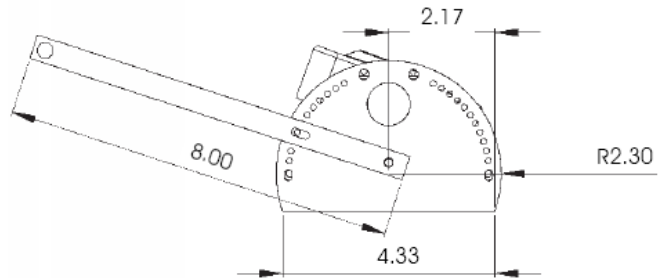

DL8-T5-UH

Zone	Lumens	% Lamp	Fixture
0-30	3620	36.2	38.6
0-40	5026	50.3	53.6
0-60	7421	74.2	79.2
0-90	9364	93.6	99.9

Total Luminaire Optical Efficiency = 93.7%

Luminaire Spacing Criterion

0 deg	90 deg
1.22	.48

