



CATALOG NUMBER	
PROJECT NAME	TYPE
VOLTAGE	LAMPS

Industrial Strip T8 and T5HO

SPECIFICATIONS

- Specification grade for new construction or renovation of any building
- Multiple reflector options
 - 95% Enhanced Aluminum
 - 91% White Aluminum
 - White formed ballast cover
- Multiple lamp and ballast options
 - T5 HO or T8
 - Super T8 High efficiency
- Riveted construction for durability
- 23 GA Die formed steel housing
- Ample KOs on back and ends
- Tool-less ballast access



APPLICATIONS

- Warehouses
- Distribution centers
- Retail Applications
- Manufacturing Facilities

ORDERING GUIDE:

F1042 /

E /

T8/N /

Cord

SERIES	REFLECTOR	BALLASTS	OPTIONS
<input type="checkbox"/> F1041 - 4 FT - 1 LAMP <input type="checkbox"/> F1042 - 4 FT - 2 LAMP <input type="checkbox"/> F1043 - 4 FT - 3 LAMP <input type="checkbox"/> F1082 - 8 FT - 2 LAMP <input type="checkbox"/> F1084 - 8 FT - 4 LAMP <input type="checkbox"/> F1086 - 8 FT - 6 LAMP	<input type="checkbox"/> E - 95% ENHANCES <input type="checkbox"/> W - 91% WHITE ALUM <input type="checkbox"/> N - WHITE BALLAST COVER ONLY	<input type="checkbox"/> T5/H - T5HO <input type="checkbox"/> T8/L - T8 LPF <input type="checkbox"/> T8/N - T8 NPF <input type="checkbox"/> T8/H - T8 HPF <input type="checkbox"/> 4H - 347/480V (T5 ONLY)	<input type="checkbox"/> XXXXBYY - Y= # OF LAMPS XXXX= TOTAL # OF LUMENS REQUIRED <input type="checkbox"/> WC - 11 GA WIRE CAGE <input type="checkbox"/> FIOS - FACTOR INSTALLED OS <input type="checkbox"/> UP - UP LIGHT <input type="checkbox"/> LIXX - LAMPS INSTALLED XX = LAMP COLOR (EX. LI85 = 850 5000K) <input type="checkbox"/> CORDX - CORD X= SPEC LENGTH <input type="checkbox"/> QDCX - QUICK DISCONNECT CORD, X= SPECIFY LENGTH <input type="checkbox"/> EB- EXTRA BALLAST <input type="checkbox"/> SD480 - 480V STEP DOWN TRANSFORMER



CATALOG NUMBER	
PROJECT NAME	TYPE
VOLTAGE	LAMPS

Industrial Strip **T8 and T5HO**


Mounting Options

- Surface
- Pendant
- Chain Hung

Dimensions - 4 in. x 9 in.

F1084/E/T8/N

Coefficients of Utilization																
plc=	0.20		0.80		0.10		0.70		0.50		0.30		0.10		0.00	
pcc->	0.70	0.50	0.30	0.10	0.70	0.50	0.30	0.10	0.50	0.30	0.10	0.50	0.30	0.10	0.00	0.00
RCR	0	1	2	3	4	5	6	7	8	9	10	0	1	2	3	4
0	114	114	114	114	111	111	111	111	106	106	106	102	102	102	98	98
1	104	100	96	92	102	98	94	90	93	90	88	90	87	85	82	82
2	95	87	81	75	92	85	79	74	82	77	73	79	75	71	68	68
3	87	77	69	63	84	75	68	62	72	66	61	70	65	60	57	57
4	80	68	60	54	77	67	59	53	65	58	53	62	57	52	49	49
5	73	61	53	47	71	60	52	46	58	51	46	56	50	45	43	43
6	68	55	47	41	66	55	47	41	53	46	40	51	45	40	38	38
7	63	51	42	36	62	50	42	36	48	41	36	47	41	36	34	34
8	59	46	38	33	58	46	38	33	44	37	32	43	37	32	30	30
9	55	43	35	30	54	42	35	30	41	34	29	40	34	29	27	27
10	52	40	32	27	51	39	32	27	38	31	27	37	31	27	25	25

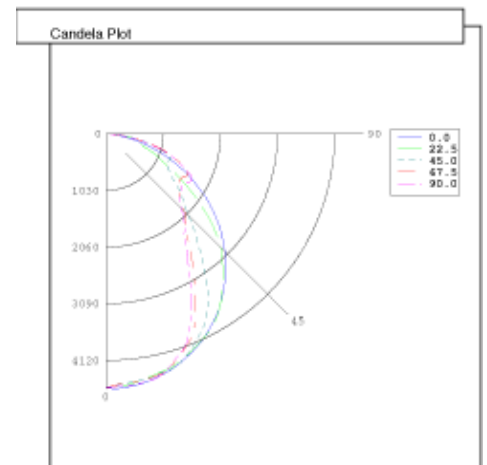

Luminaire Properties	
Number of Lamps:	4
Lumens Per Lamp:	2950
Input Watts:	115
Distribution:	Direct
Symmetry:	Quadriateral
Photometric Type:	Type C
Luminous Shape:	Rectangle
Units:	Feet
Luminous Dimensions:	
0-180 Axis:	8.0
90-270 Axis:	0.78
Height:	0.00

Zonal Lumen Summary			
Zone	Lumens	% Lamp	% Fixture
0-30	3486	30	31
0-40	5436	46	48
0-60	8842	75	78
0-90	11282	96	100
90-120	0	0	0
90-150	0	0	0
90-180	0	0	0
0-180	11282	96	100